


ECONOMIC

Economic air curtains for small commercial premises



CONTROL
Version E

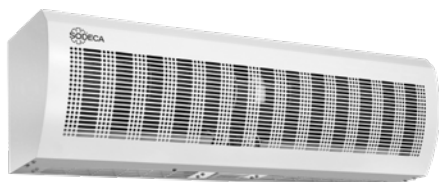

CONTROL
Version S

Economic air curtains for heights up to 3 m, for horizontal installation, specially designed for small commercial spaces.

Construction:

- Painted metal structure.
- Design for horizontal installation.
- Version S: Two speed fan.
- Led indicator of operation.
- Brackets for wall mounting.
- Control with remote control.

Version:

- S: Environmental. Air recirculation.
- E: Electrical. Electric coil control with safety elements. Delayed fan stop to evacuate residual heat.

Application:

- Small commercial premises
- Shops
- Bars
- Offices

Order code

AC - 10 - E

ECONOMIC: Economic air curtains for small commercial premises

09: Length 90 cm
10: Length 100 cm
15: Length 150 cm
20: Length 200 cm



S: Environmental
E: 230 V or 400 V
Electrical depending on model

CONTROL	Environmental	Electrical
Operation	Manual	Manual
Speeds	2 speeds	1 speed
Electrical battery control	NO	1 power level
Contact door	NO	NO
Led operating indicator	YES	YES

Technical characteristics

Model	Height door (m)	Maximum flow rate (m³/h)	Sound pressure level dB (A) Irradiated	Heat power (kW)	Battery voltage (V)	Battery current (A)	Fan voltage (V)	Fan current (A)	Approx. weight (Kg)
AC-09-S	3	1780	43	-	-	-	1x230	0.65	13
AC-10-S	3	1980	44	-	-	-	1x230	0.72	14
AC-15-S	3	2970	46	-	-	-	1x230	0.95	20
AC-20-S	3	3960	51	-	-	-	1x230	1.39	25
AC-09-E	3	1000	45	3.8	1x230	15.2	1x230	0.65	16
AC-10-E	3	1150	45	4.6	1x230	19.0	1x230	0.72	17
AC-15-E	3	1800	47	5.9	3X400	8.3	1x230	0.95	26
AC-20-E	3	2400	51	10.5	3X400	16.0	1x230	1.38	32

Dimensions mm

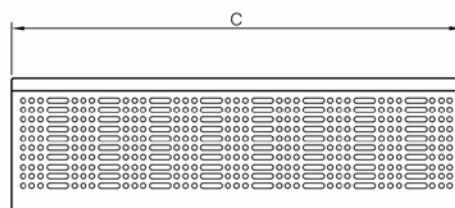

	A	B	C
AC-09-S	200	215	900
AC-10-S	200	215	1000
AC-15-S	200	215	1500
AC-20-S	200	215	2000
AC-09-E	195	220	900
AC-10-E	195	220	1000
AC-15-E	195	220	1500
AC-20-E	195	220	2000